


A124

DORMER


- Stub Drill
- Spiralbohrer, kurz
- Extra korte boor
- Foret extra-court
- Broca extra corta
- Broca Extra Curta

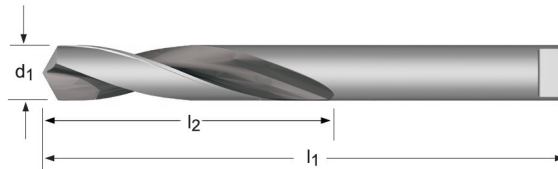

A124

Tang to DIN 1809 / mit Mitnehmer DIN 1809 / Meeneemlip DIN 1809 / Tenon selon la DIN 1809 / Lengüeta según DIN 1809 / Lingueta conforme DIN 1809

Carbide Tipped / HM-Schneiden / HM Inzetplaten / Pointe carbure / Punta de Metal Duro / Empastilhado



■ 3.1 3.2 3.3 3.4

• 1.5 1.6 2.2 2.3 4.1 4.2 4.3 5.1 5.2 5.3 6.2 6.3 6.4 8.2 9.1

| d ₁ Ø mm | d ₁ decimal Inch | l ₂ mm | l ₁ mm | e-Code | d ₁ Ø mm | d ₁ decimal Inch | l ₂ mm | l ₁ mm | e-Code |
|---------------------------|-----------------------------------|----------------------|----------------------|---------|---------------------------|-----------------------------------|----------------------|----------------------|----------|
| 3,00 | 0.1181 | 20 | 50 | A1243.0 | 7,50 | 0.2952 | 40 | 80 | A1247.5 |
| 3,50 | 0.1377 | 25 | 56 | A1243.5 | 8,00 | 0.3149 | 40 | 80 | A1248.0 |
| 4,00 | 0.1574 | 25 | 56 | A1244.0 | 8,50 | 0.3346 | 50 | 90 | A1248.5 |
| 4,20 | 0.1653 | 28 | 63 | A1244.2 | 9,00 | 0.3543 | 50 | 90 | A1249.0 |
| 4,50 | 0.1771 | 28 | 63 | A1244.5 | 9,50 | 0.3740 | 50 | 90 | A1249.5 |
| 4,80 | 0.1889 | 28 | 63 | A1244.8 | 10,00 | 0.3937 | 56 | 100 | A12410.0 |
| 5,00 | 0.1968 | 28 | 63 | A1245.0 | 10,50 | 0.4133 | 56 | 100 | A12410.5 |
| 5,20 | 0.2047 | 32 | 71 | A1245.2 | 11,00 | 0.4330 | 56 | 100 | A12411.0 |
| 5,50 | 0.2165 | 32 | 71 | A1245.5 | 11,50 | 0.4527 | 63 | 112 | A12411.5 |
| 5,80 | 0.2283 | 32 | 71 | A1245.8 | 12,00 | 0.4724 | 63 | 112 | A12412.0 |
| 6,00 | 0.2362 | 32 | 71 | A1246.0 | 13,00 | 0.5118 | 63 | 112 | A12413.0 |
| 6,50 | 0.2559 | 32 | 71 | A1246.5 | 14,00 | 0.5511 | 71 | 125 | A12414.0 |
| 6,80 | 0.2677 | 40 | 80 | A1246.8 | 15,00 | 0.5905 | 71 | 125 | A12415.0 |
| 7,00 | 0.2755 | 40 | 80 | A1247.0 | 16,00 | 0.6299 | 80 | 140 | A12416.0 |